




FERRETTI YACHTS 670





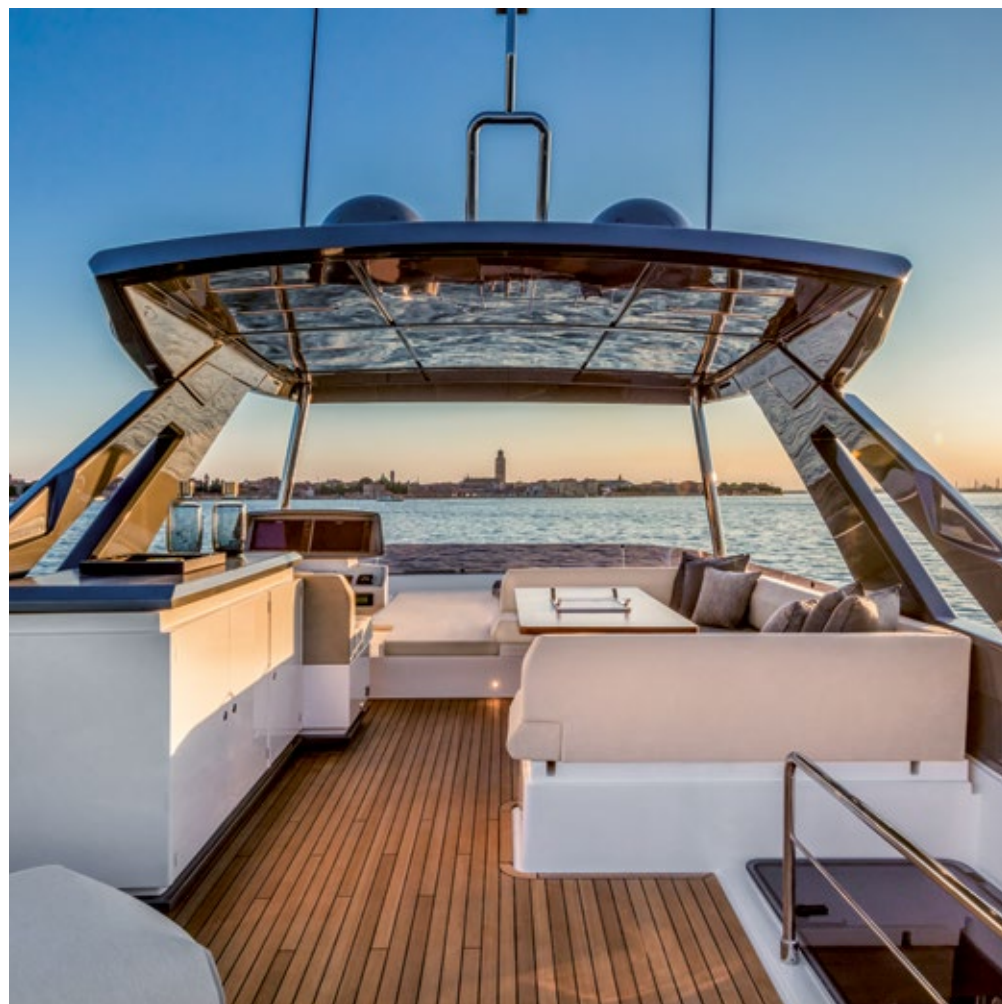










INTERIORS





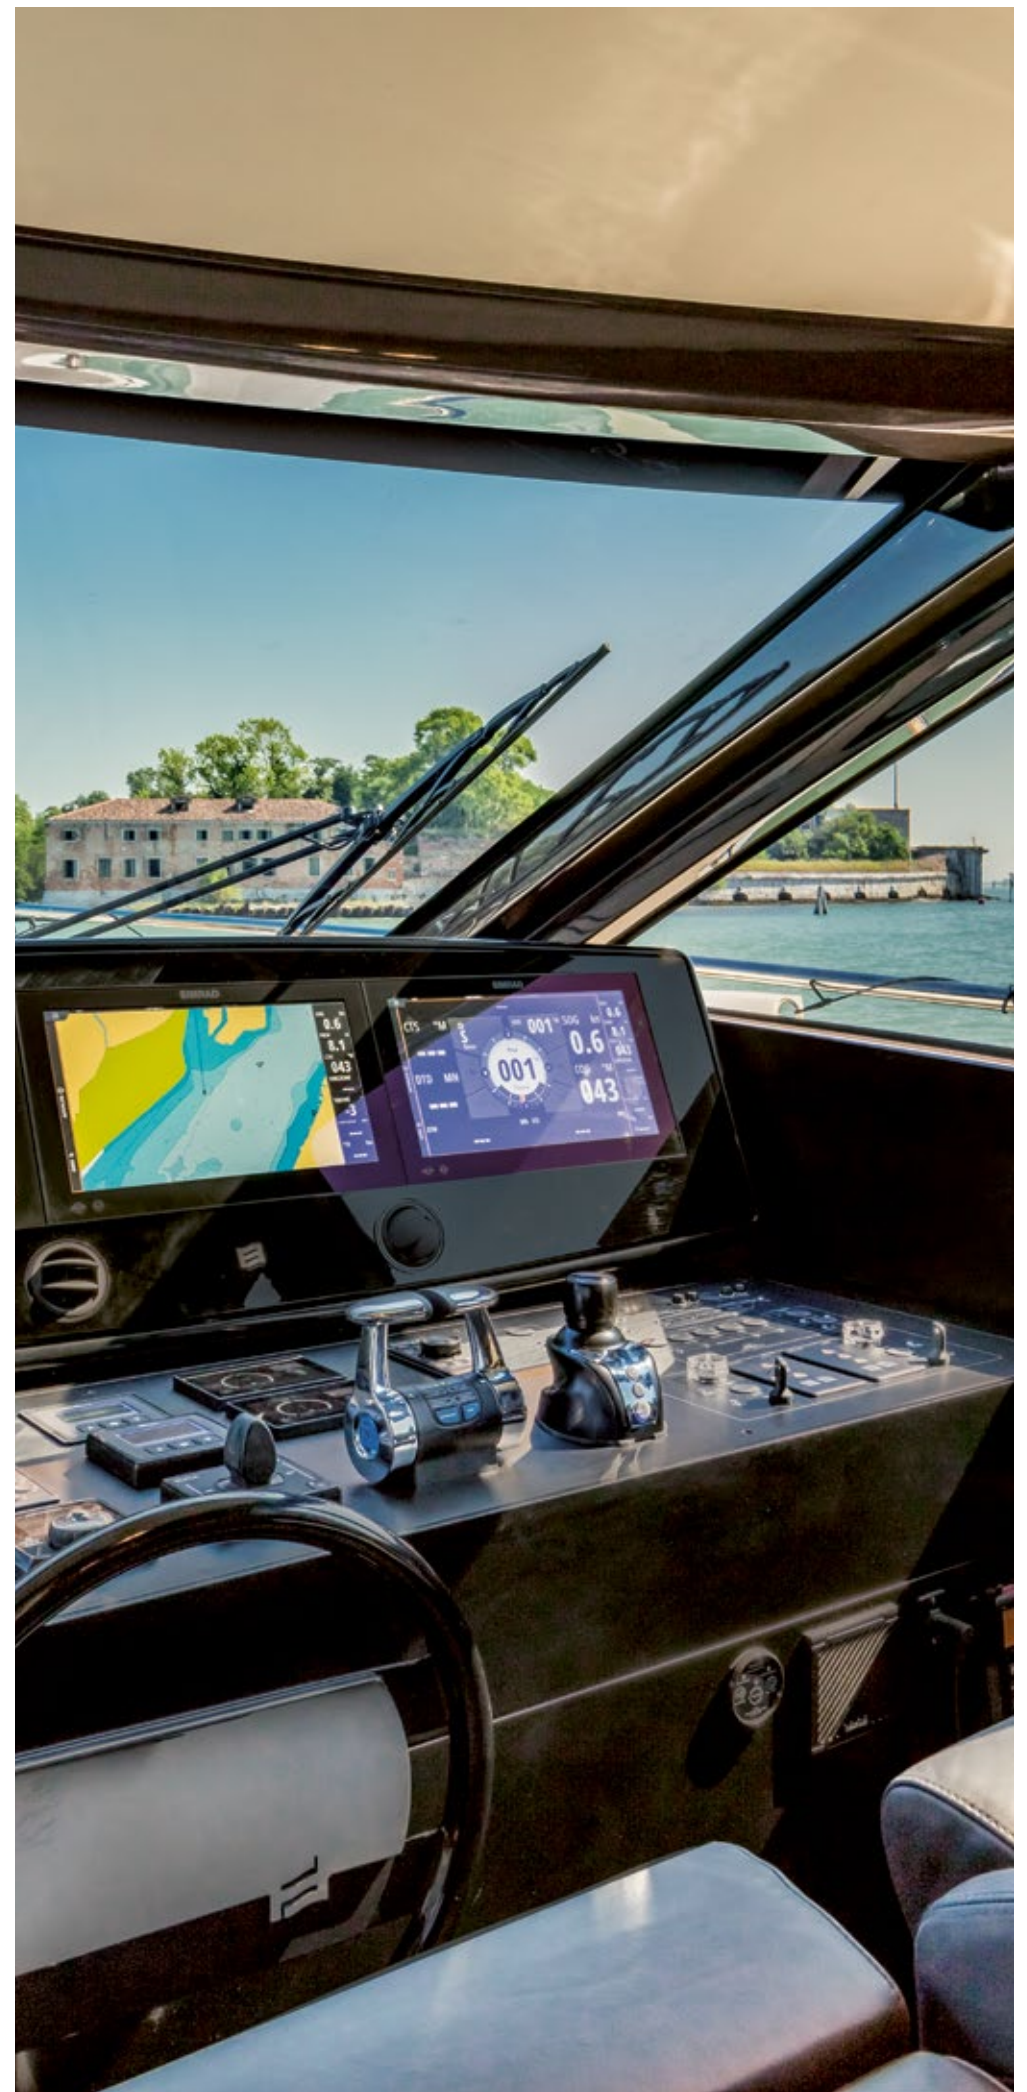













INTERIORS









FERRETTI YACHTS 670



STANDARD VERSION  
标准版本



ROLL BAR VERSION  
雷达架版本



HARD TOP VERSION  
硬顶版本

ENGINES  
AND SPEED

|                                                                       |                                                                       |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| <b>STD</b><br>2 x MAN V8 1000<br>Power 1000 mhp/735 kW<br>at 2300 rpm | <b>OPT</b><br>2 x MAN V8 1200<br>Power 1200 mhp/882 kW<br>at 2300 rpm |
| Maximum speed                                                         | Maximum speed                                                         |
| <b>28 knots</b>                                                       | <b>32 knots</b>                                                       |
| Cruising speed                                                        | Cruising speed                                                        |
| <b>25 knots</b>                                                       | <b>28 knots</b>                                                       |

MAIN  
SIZES

|                                           |
|-------------------------------------------|
| LOA = Overall Length<br>standard ISO 8666 |
| <b>20,24 m - 66 ft. 5 in.</b>             |
| LH = Hull length standard<br>ISO 8666     |
| <b>19,29 m - 63 ft. 3 in.</b>             |
| Maximum beam                              |
| <b>5,38 m - 17 ft. 8 in.</b>              |

TECHNICAL  
DATA



|                               |                                                    |                                              |
|-------------------------------|----------------------------------------------------|----------------------------------------------|
| Displacement<br>unladen       | Displacement<br>laden                              | Depth under propellers<br>(boat fully laden) |
| <b>39.50 t - 87083 lbs.</b>   | <b>47.50 t - 104720 lbs.</b>                       | <b>1,64 m - 5 ft. 5 in.</b>                  |
| Fuel tank capacity            | Water tanks capacity                               | Maximum number of people<br>on board         |
| <b>3800 l - 1004 US Gals.</b> | <b>1000 l - 264 US Gals.</b>                       | <b>18</b>                                    |
| Design category               | Certification modules                              |                                              |
| <b>A</b>                      | <b>B + F + Aa<br/>(Sound Emission) RINA S.p.A.</b> |                                              |

The data below refer to the standard version. The performance is estimated at the following conditions: 42.7 t - 94150 lbs.; conditions: standard version displacement of the yacht at 1/3 of load, clean hull, 25°C air temperature, good weather conditions, 8 persons on board; overloading the yacht by: 0,5 t - 1102 lbs. top speed decreases of: 1 knots..


| 发动机和速度                                                            |                                                                   | 主要尺寸                                      | 技术数据                             |                                          |                            |
|-------------------------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------|----------------------------------|------------------------------------------|----------------------------|
| 标配<br>2 x MAN V8 1000 发动机，<br>额定功率1000马力 / 735千瓦，<br>额定转速2300转/分钟 | 选配<br>2 x MAN V8 1200 发动机，<br>额定功率1200马力 / 882千瓦，<br>额定转速2300转/分钟 | LOA=全长 (ISO 8666)<br><br>20.24米－66英尺5英寸   | 空载排水量 （即船重）<br><br>39.50吨－87083磅 | 满载排水量<br><br>47.50吨－104720磅              | 满载吃水深度<br><br>1.64米－5英尺5英寸 |
| 最大航速<br><br>28节                                                   | 最大航速<br><br>32节                                                   | LH = 船体长 (ISO 8666)<br><br>19.29米－63英尺3英寸 | 油箱容量<br><br>3800升－1004美加仑        | 水箱容量<br><br>1000升－264美加仑                 | 限载人数<br><br>18             |
| 巡航速度<br><br>25节                                                   | 巡航速度<br><br>28节                                                   | 型宽<br><br>5.38米－17英尺8英寸                   | 设计等级<br><br>A级                   | 证书类型<br><br>B + F + Aa<br>(噪音排放)－RINA船级社 |                            |

以下数据基于标准版本船型测得。游艇性能根据以下条件估算: 在 1/3 液体负载、干净船体、25° C气温、良好气候条件及船载8名人员条件下测得标准排水量：42.7吨－94150磅，若游艇每过载0.5吨-1102磅，则最大航速降低：1节

STANDARD LAYOUT - 标准布局

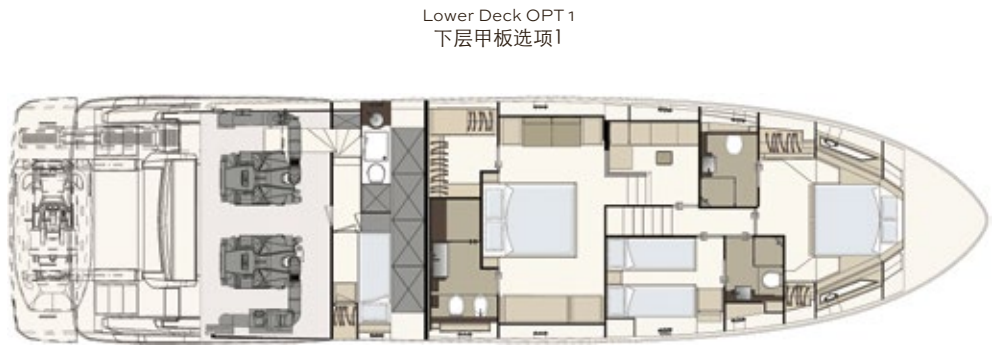
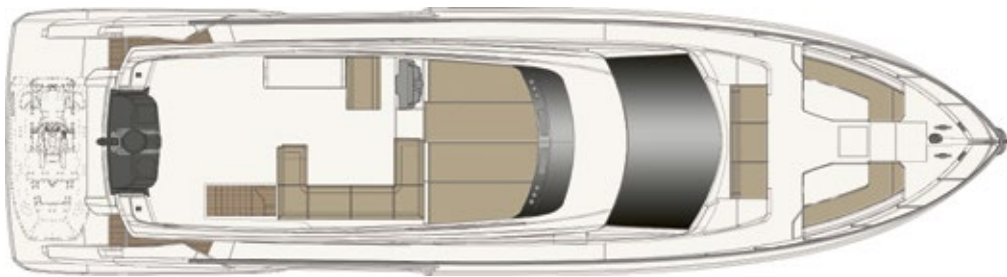


Lower Deck OPT 1  
下层甲板选项1

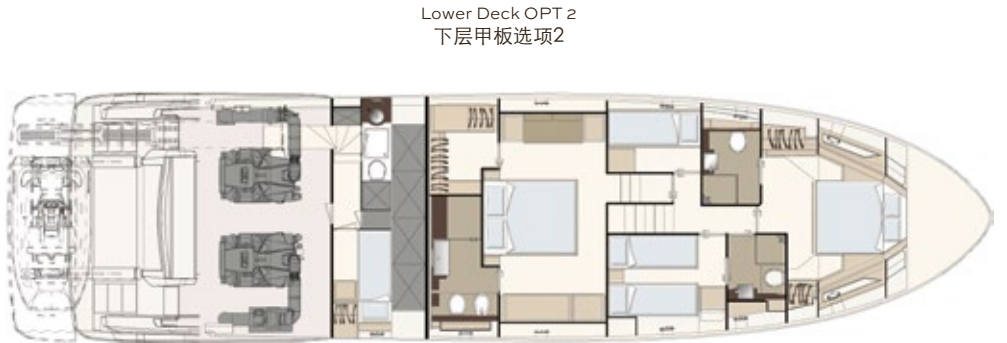

Lower Deck OPT 2  
下层甲板选项2

APAC LAYOUT - 亚太版布局

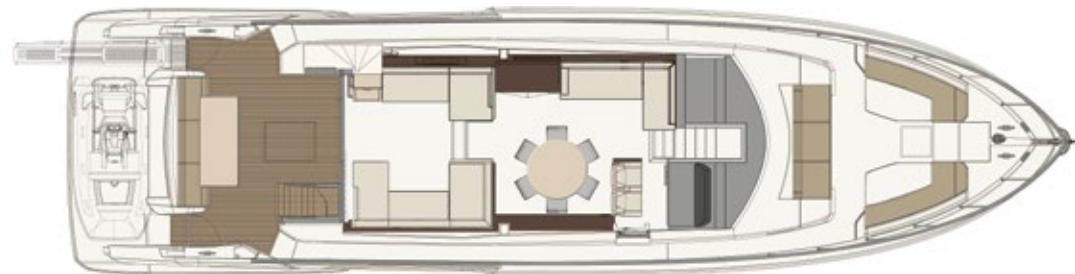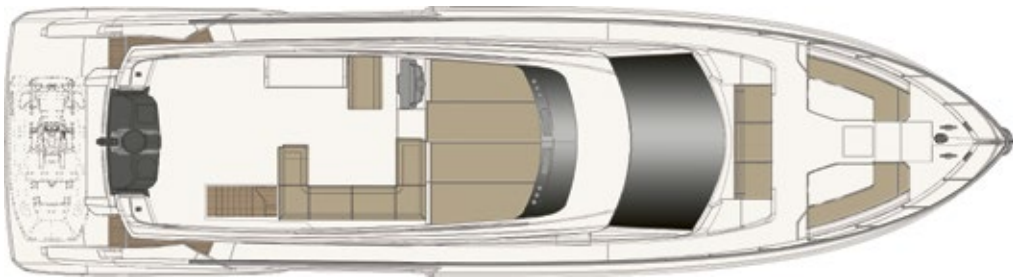

Lower Deck OPT 1  
下层甲板选项1



Lower Deck OPT 2  
下层甲板选项2

Naval & technical design: Ferrettigroup Engineering Department. Exterior design: Ferretti Group in collaboration with Arch. Filippo Salvetti. Interior design: Ferrettigroup Engineering Dept. Interior Design.  
船舶技术设计：法拉帝集团工程部。外观设计：法拉帝集团与建筑师Filippo Salvetti。室内设计：法拉帝集团工程部室内设计团队。